


TECHNICAL SPECIFICATIONS

EXPLORO FM	LTD	TEAM
Frame material	Unidirectional carbon - ultralight layup	Unidirectional carbon
Frame weight (+/-5%)	990g (Medium, frame-only)	1090g (Medium, frame-only)
BB	BB386EVO	
Chainring fit	Max inner ring: 36T Max outer ring: 50T Max single ring (offset ring): 46T Max single ring (flat ring): 50T Max SRAM AXS 2x combination: 46/33T	
Headset	1 1/8" - 1 1/2" integrated tapered IS42/28.6 IS52/40.	
Seatpost	3T Charlie Exploro (CHARLIE STRADA is NOT compatible with the EXPLORO frame)	
Front axle	Syntace X-12 thru-axle 100x12mm spacing	
Rear axle	Syntace X-12 thru-axle 142x12mm spacing	
Front brake	Flatmount for 140/160mm disc	
Rear brake	Flatmount for 140/160mm disc	
Cable routing	Internal via interchangeable FlipTop covers for 1x10/11, 2x10/11, Di2, eTap	
Bag mount	100mm front-post-to-bearing-bore-edge	
Included in frame box	Frame, fork, seatpost, seatpost internal clamp, front 7 rear thru axle, 1 front and 2 rear derailleur hangers, FlipTop covers, front derailleur cable liner, noise-cancelling foam sleeve for rear derailleur housing and brake hose	

DESIGN

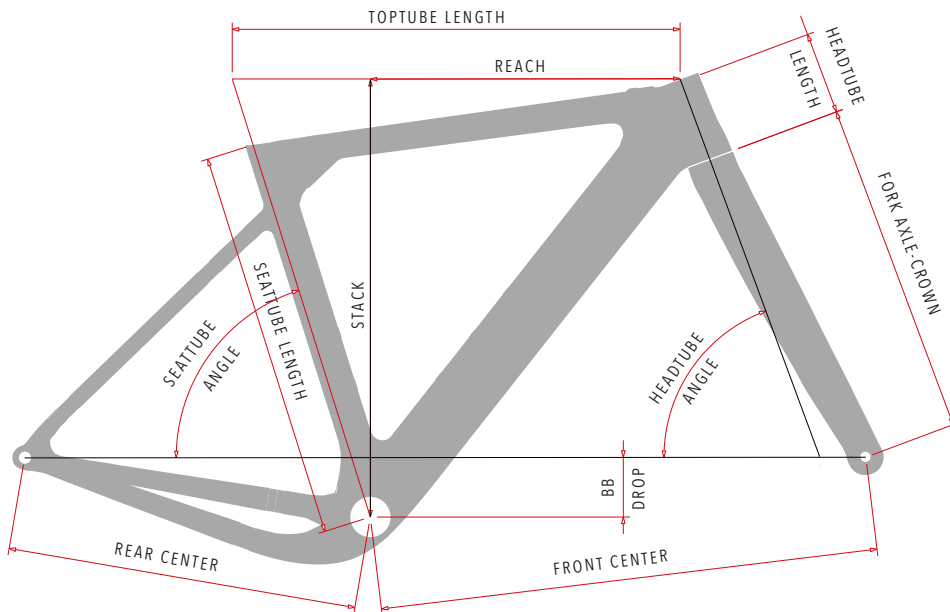

SIZE	FORK AXLE-CROWN	HEADTUBE ANGLE	SEATTUBE ANGLE	TOPTUBE LENGTH	SEATTUBE LENGTH	HEADTUBE LENGTH	BB DROP	STACK	REACH	FRONT CENTER	REAR CENTER	FORK RAKE
S	395	69,5	72,5	529	463	101	70	517	366	591	415	50
M	395	71,1	72,5	550	490	125	70	546	378	598	415	50
L	395	72,5	72,5	571	517	150	70	575	390	606	415	50
XL	395	72,5	72,5	592	545	180	70	604	402	627	415	50



EXPLORO LTD STEALTH



EXPLORO TEAM