


TECHNICAL SPECIFICATIONS

Frame versions	3T Strada Integrale 1X (seattube optimized for no FD mount inserts) - 3T Strada Integrale 2X (FD hanger is part of the frame)
Frame material	Unidirectional pre-preg carbon, High-modulus/high-strength performance blend layup
Frame weight (without hardware and small parts +/- 3%)	970g (Medium 1x, frame only)
Fork	3T Fundi Integrale (D shape steering tube, Apto Integrale Stealth stem recommended)
Fork Weight (without hardware and small parts +/- 3%)	390g (Medium, fork only)
Cable routing	Fully Internal cable Routing using 3T Integrale Technology, compatible with SRAM and Shimano electronic drivetrains, both 2x and 1x
BB	BB386EVO
Headset	3T MinMax Integrale IS42/31.8 + IS47/33
Seatpost	Strada Integrale Seatpost for Ritchey Clamp
Front Axle	Syntace X-12 thru-axle 100x12mm spacing, custom thread length
Rear Axle	Syntace X-12 thru-axle 142x12mm spacing, custom thread length
Front brake	Direct-mount for 160mm disc
Rear brake	Flatmount for 140 & 160mm disc
Tire clearance	Effective width: 30mm, Wheel radius: 344mm. More info
Included in frame	Frame, fork, headset kit, seatpost, seatpost internal clamp, front and rear thru axle, rear derailleur hanger, noise-cancelling foam sleeve for rear derailleur housing and brake hose

SIZE CHART FRAMESET

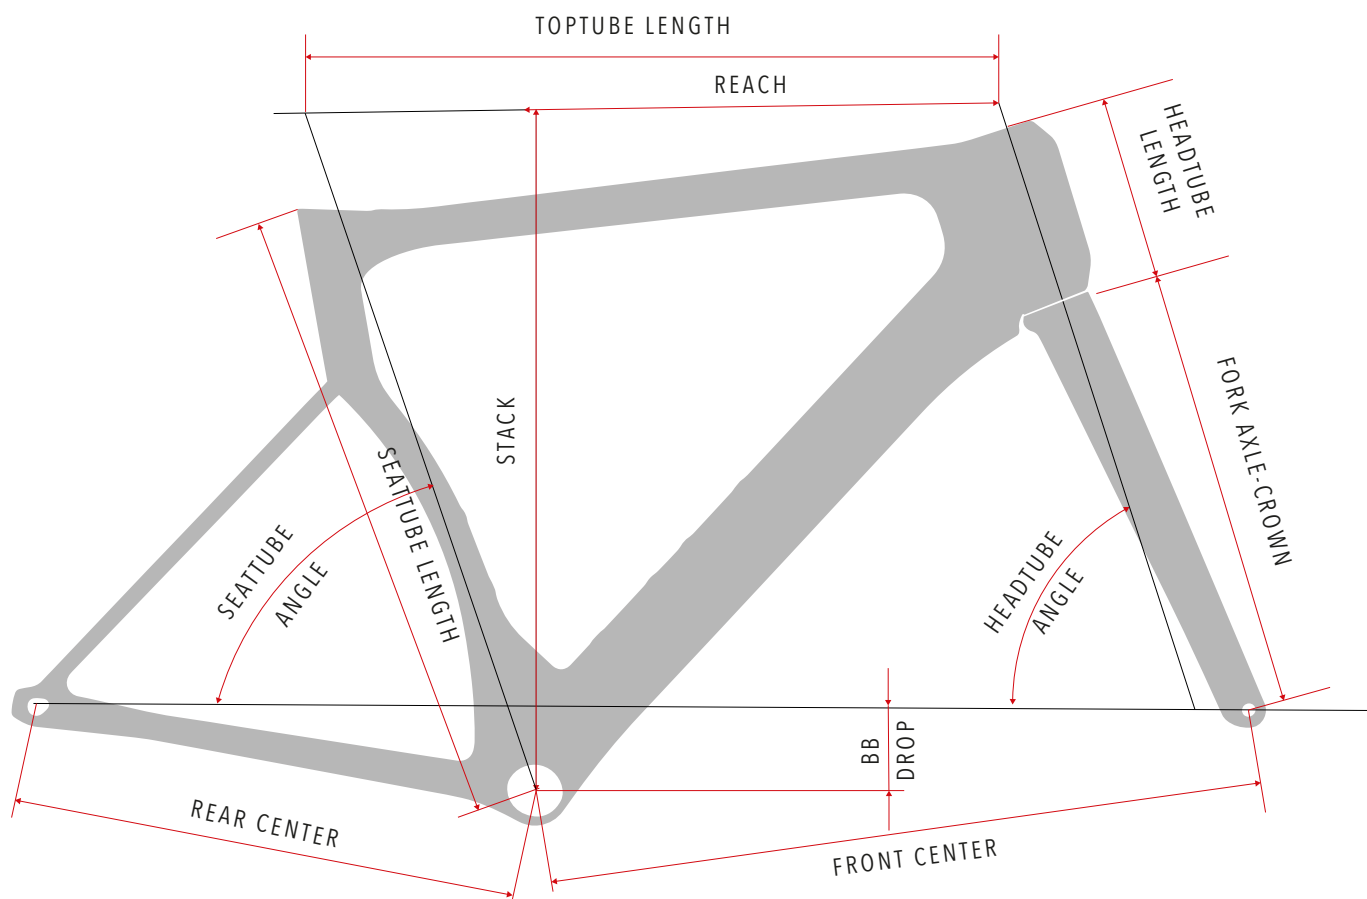

SIZE	RELATIVE SIZING <i>Strada 1st Gen</i>	FORK AXLE-CROWN	HEADTUBE ANGLE	SEATTUBE ANGLE	TOPTUBE LENGTH	SEATTUBE LENGTH	HEADTUBE LENGTH	BB DROP	STACK	REACH	FRONT CENTER	REAR CENTER
XXS	XS	355	69,5	72,5	507	487	119	71	501	349	567	405
51	S	355	71,0	72,5	529	500	119	69	507	369	574	405
54	M	355	72,7	72,5	550	506	143	69	536	381	580	405
56	L	355	73,2	72,5	571	518	172	69	565	393	596	405
58	XL	355	73,2	72,5	592	533	202	69	594	405	616	405