


TECHNICAL SPECIFICATIONS

Frame	Strada Integrale 1X (seattube optimized for no FD mount inserts) - Strada Integrale 2X (FD hanger is part of the frame)
Standard colors	Various, see side-by-side specs. More info .
Frame material	Unidirectional pre-preg carbon, High-modulus/high-strength performance blend layup
Frame weight (painted, without hardware and small parts +/- 5%)	990gr (size 54, 1X version, frame only)
Fork	3T Fundi Integrale (D shape steering tube, designed for 3T Integrale stems)
Max. headset spacer height	35mm (spacer height between transition spacer and headset top bearing cover)
Fork Weight (painted, without hardware and small parts +/- 5%)	390g (size 54, fork only)
Cable routing	Fully Internal cable Routing using 3T Integrale Technology.
Groupset compatibility:	<p>- If built using Apto Integrale Stealth(provided with any Strada Integrale frameset or full bike), compatible with SRAM and Shimano electronic drivetrains, both 2x and 1x. Mechanical groupsets not compatible. Please see "ASSEMBLY GUIDE USING 3T APTO INTEGRALE STEM"</p> <p>- If built using More Integrale stem, compatible with SRAM and Shimano electronic drivetrains, both 2x and 1x + 1x mechanical groupsets. Please see "ASSEMBLY GUIDE USING 3T MORE INTEGRALE STEM"</p>
BB shell	BB386EVO
Recommended BB's	Thread-together systems such as Token Ninja
Headset	3T MinMax Integrale IS42/34 IS47/38(36deg). More info
Seatpost	Strada Integrale Seatpost for Ritchey Clamp. More info
Front thru-axle	Syntace X-12 thru-axle 100x12mm spacing, custom thread length. More info
Rear thru-axle	Syntace X-12 thru-axle 142x12mm spacing, custom thread length. More info
Front brake	160mm disc
Rear brake	140 & 160mm disc
Maximum tire:	30mm WAM (Width as measured) , 344mm RAM (radius as measured)
Included with frame	Frame, fork, seatpost, seatpost wedge, stem, handlebar, front thru axle; rear thru axle, front derailleur hanger; rear derailleur hanger, headset, headset spacer kit, noise-cancelling foam sleeve for rear derailleur housing and brake hose

TORQUE VALUES Nm

COMPONENT	TORQUE Nm
Ritchey saddle clamp	12Nm
Seatpost wedge	7Nm
Front thru axle	10 - 16Nm
Rear thru axle	10 - 16Nm
Rear derailleur Hanger	10Nm
Water bottle cage bolts	2Nm

SIZE CHART FRAMESET

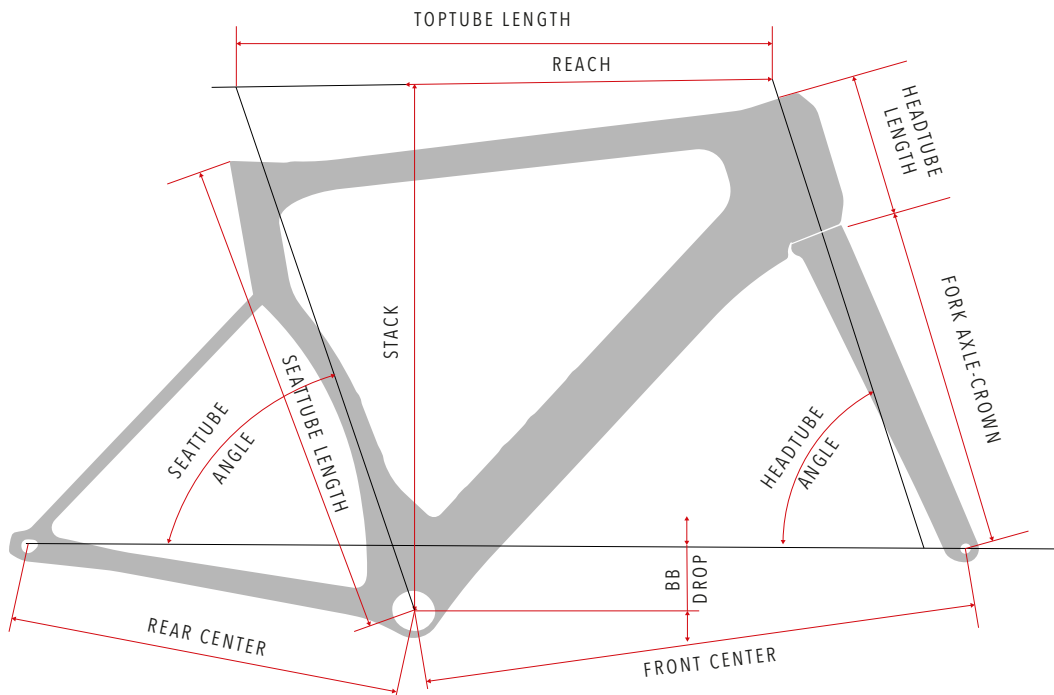

SIZE	XXS	51	54	56	58
RIDER HEIGHT* (CM)	150-163	157-170	168-180	178-191	188-201
RIDER HEIGHT* (INCHES)	4'9"-5'4"	5'2"-5'7"	5'6"-5'11"	5'10"-6'3"	6'2"-6'7"
MAX BB TO SADDLE RAIL**(mm)	617	670	706	758	803
STACK	501	507	536	565	594
REACH	349	369	381	393	405
HEADTUBE ANGLE	69.5	71.0	72.7	73.2	73.2
FORK AXLE-CROWN	355	355	355	355	355
FRONT CENTER	567	574	580	596	616
REAR CENTER	405	405	405	405	405
BB DROP	71	69	69	69	69
HEADTUBE LENGTH	119	119	143	172	202
TOPTUBE LENGTH	507	529	550	571	592
SEATTUBE LENGTH	487	500	506	518	533
SEATTUBE ANGLE	72.5	72.5	72.5	72.5	72.5